



● ● ● ● **ADSL2+ over POTS 600ohm Splitter Module**

CLSP008N3F

Application

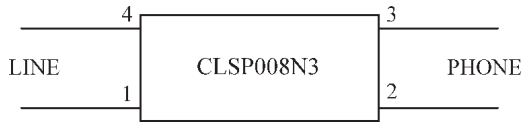

Outline Dimensions

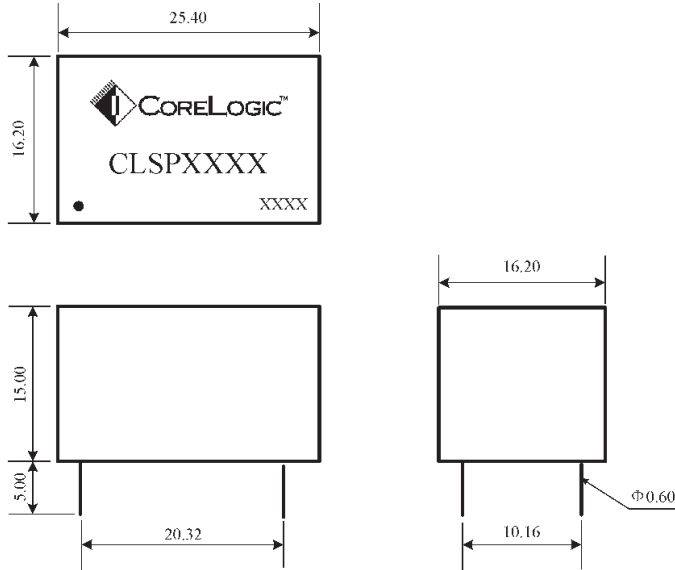

Standards complied

- YD/T 1187-2002 & ITU-T G.992.1 E1
- RoHS compliant

Electrical Specs

Impedance		Z=600Ω
Attenuation	30-300KHz	65dB (min)
	300-1104KHz	55dB (min)
Insertion Loss	1020Hz	0.3dB (min)
	300-500Hz	14dB (min)
Return Loss	500-2000Hz	18dB (min)
	2000-3400Hz	14dB (min)
Longitudinal Conversion Loss	0.2-1.0KHz	58dB (min)
	1.0-3.0KHz	53dB (min)
Group Delay Distortion	500-2800Hz	150uS (max)
DC resistance		25Ω (max)
Ringing Voltage		0~105 V
DC Current		100mA (max)